

Synchroprint **S**Type *transfer*


Ergonomic MHM S-Type Multitask combines 2 features indispensable for any modern printing workshop dealing with all sorts of substrates – standard printing on fabric as well as vacuum print for transfer.

MHM S-Type Multitask is equipped with the vacuum system which can be enabled whenever needed (only 2 simple steps: substitute standard pallets for vacuum ones, change settings in the software).

MHM S-Type Multitask with its powerful level of control and quality proves superior performance and guarantees absolute precision in both standard and vacuum applications. Printing capacity amounts to 1400 pieces



Strong Aluminium Vacuum Pallets:

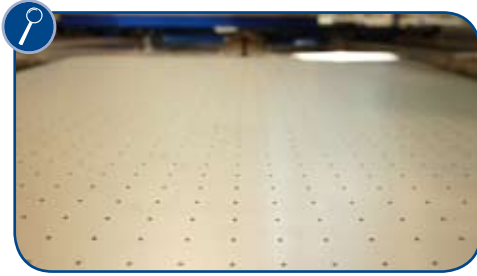

Strong Aluminium Pallets (without vacuum)



- Strong aluminium pallets are available in different sizes and configurations.
- Both standard and vacuum pallets have a honeycomb structure, giving the advantage of easy handling and amazing durability at the same time.
- A set of each pallet type is listed as a standard feature in MHM S-Type Multitask scope of supply.

Vacuum System:


Highly efficient Vacuum Pump provides constant volume of vacuum interruption-free thus eliminating any registration problems. The substrate remains steadily fixed onto the pallet all the time.



- Due to special pipe system design no vacuum pressure reduction occurs along the full length of the Vacuum System.

Registration Control:

Registration Control helps position the substrate on the pallet with maximum precision within a few seconds.

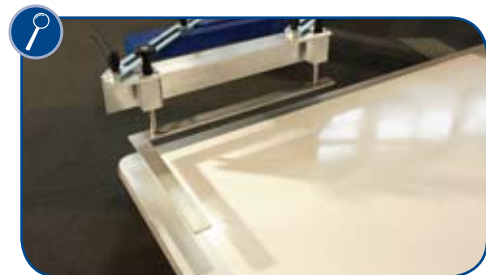

	SP 10	SP 12	SP 14
Number of pallets	10	12	14
Max. no. of print stations/colours	8	10	112
Max. image area (cm/inch)	45 x 55 / 17,7" x 21,6"		
Overall diameter (cm/inch)	460/ 181"	500/ 197"	540 / 213"
Height of machine (cm/inch)	175 / 68,9"		
Weight of machine (kg/lbs)*	2150 / 4735	2300 / 5070	2600 / 5725
Air consumption (l/min.)	400	450	500
Air pressure (min)	7 bar / 90 PSI (filtered, dry air supply only)		
Electrical supply	1ph-200-240V, 50/60Hz (+/- 5%)		
Electrical requirement - indexer	1,6 kW		
Electrical requirement - per printhead	0,4 kW		
Max. frame size (cm/inch)	63,5 x 91 / 25" x 35,8"		
Production capacity (pcs)**	1400	1400	1100

We reserve the right to change specifications without prior notice.
* Total weight (unpacked) with max. number of print stations/colours
** Single print stroke and medium length of stroke